

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2023/9/16	C. Chen

## TECHNICAL DATA

### ► Electrical Data


Frequency Range	1~1.5GHz
Insertion Loss	0.6dB max
VSWR	1.4:1 max
Isolation	16dB min
Forward Power	200W
Reverse Power	30W
Direction	Clockwise
Impedance	50 Ohms

### ► Mechanical Data

Dimensions	34×34×22mm
Connector	SMA-Female
Material	Aluminum
Surface Finish	Nickel Plated

### ► Environmental Data

Operating Temperature	0°C~+60°C
Storage Temperature	-30°C~+70°C

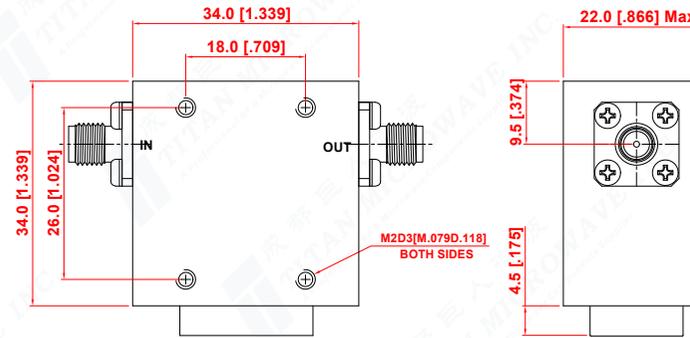

DRAWN: L. Ma 16/09/23		
ENGINEER: J. Zhu 16/09/23		
APPROVED: C. Chen 16/09/23		
TOLERANCE UNLESS OTHERWISE SPECIFIED		

x	±0.50	[0.019"]
.x	±0.20	[0.008"]
.xx	±0.10	[0.004"]
ANGLES	±1°	

TITLE:

Coaxial Isolator  
1-1.5GHz,  
200W, SMA-Female

PART No.:

TMCI-01000150-200S



[www.titan-microwave.com](http://www.titan-microwave.com)



DIMENSIONS IN MILLIMETERS(mm)

SIZE: A4	SCALE:	SHEET: 1/1	REV: A
-------------	--------	---------------	-----------

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY